

AIR-O-MAX

Exhaust Fan





AIR-O-MAX

Exhaust Fan



Ventec AIR-O-MAX Polypropylene Exhaust Fans provide an energy efficient and cost effective solution for exhausting air and moisture from all types of building including warehouses, garages, greenhouses and more. These high quality fans are built with a rugged polypropylene housing, TEAO motors and PVC fan blades for increased and sustainable performance in the toughest conditions.

Looking for a versatile solution for venting moderate amounts of air at a reasonable price? Look no further you have found it, order now the Ventec AIR-O-MAX exhaust fan polypropylene.

TECHNICAL SPECIFICATION

MODEL	POWER	TENSION	RPM	SPEED	AIR FLOW	OPENING DIMENSION
12"	1/4 HP	115-230V	1625	VARIABLE	34 m ³ /min (1 200 CFM)	380 mm x 380 mm (15" X 15")
14"	1/4 HP	115-230V	1625	VARIABLE	51 m ³ /min (1 800 CFM)	440 mm x 440 mm (17.25" X 17.25")
16"	1/4 HP	115-230V	1625	VARIABLE	87 m ³ /min (3 100 CFM)	490 mm x 490 mm (19.25" X 19.25")
18"	1/3 HP	115-230V	1625	VARIABLE	104 m ³ /min (3 700 CFM)	540 mm x 540 mm (21.25" X 21.25")
20"	1/3 HP	115-230V	1625	VARIABLE	121 m ³ /min (4 300 CFM)	590 mm x 590 mm (23.25" X 23.25")
20"	1/2 HP	115-230V	1625	VARIABLE	169 m ³ /min (6 000 CFM)	590 mm x 590 mm (23.25" X 23.25")
24"	1/2 HP	115-230V	1625	VARIABLE	164 m ³ /min (5 800 CFM)	690 mm x 690 mm (27.25" X 27.25")
36"	1/2 HP	115-230V	850	CONSTANTE	313 m ³ /min (11 050 CFM)	1 020 mm x 1 020 mm (40.25" X 40.25")
36"	1 HP	115-230V	900	CONSTANTE	405 m ³ /min (14 320 CFM)	1 020 mm x 1 020 mm (40.25" X 40.25")



AIR-O-MAX

Exhaust Fan


FEATURE

DESCRIPTION	
Application	Exhaust Fan 12" to 36" sizes. Economical-Dependable-Easy to install. Ideal for poultry and swine breeding farm buildings.
Type of drive	Direct drive (Impeller on Shaft)
Housing	Impact resistant, UV-stabilized, black. Polypropylene, 3/16" thick (1/4" for 36" fan). White housing available on special order.
Propeller	Aluminium Hub, PVC with fiberglass reinforced airfoil blades (galvanized blades for 36" fan).
Shutter	Easy to remove and clean, with PVC frame, Fiberglass rods and black louvers made of PVC.
Exhaust guard	Steel, Powder Paint coating.
Motor bracket	Easy Installation and Maintenance (Aluminium, 1/8" thick).
Mounting Hardware	Stainless Steel.
Motor for 12" to 24" fans	Leeson or Marathon, One Phase, 1/4 to 1/2 HP, 115/230 V, 1625 RPM, Welded Base, Electronically Variable Speed capable, Totally Enclosed Air Over (TEAO) frame, Automatic Reset Thermal Protection, cULus/CSA certified.
Motor for 36" fans	Leeson or Century, One Phase, 1/2 or 1 HP, 115/230 V, 850 or 900 RPM, Forged/Welded Base, Single Speed, Totally Enclosed Air Over (TEAO) frame, Automatic Reset Thermal Protection, cULus/CSA certified.

ACCESSOIRES



High density polyethylene hood.
Available in black or white.

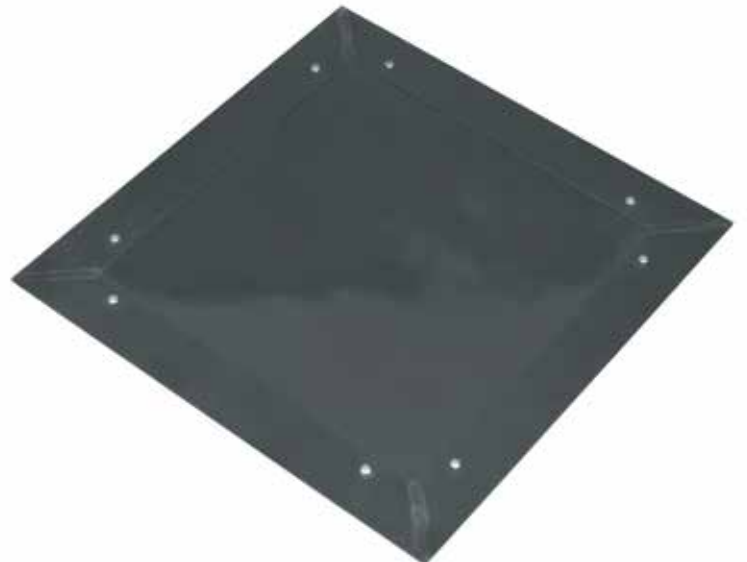

Insulated winter cover.
Available in black or white.



AIR-O-MAX

Exhaust Fan

Ventec AIR-O-MAX Polypropylene Exhaust Fans provide an energy efficient and cost effective solution for exhausting air and moisture from all types of building including warehouses, garages, greenhouses and more. These high quality fans are built with a rugged polypropylene housing, TEAO motors and PVC fan blades for increased and sustainable performance in the toughest conditions.

- Exhaust Fan 12" to 36" sizes.
- Economical-Dependable-Easy to install.
- Ideal for Poultry and Swine Breeding Farm Buildings.
- Developps from 1 200 CFM à 14 320 CFM
- White housing available on special order.
- Aluminum Hub, PVC with fiberglass reinforced airfoil blades (galvanized blades for 36" fan).

For the last 25 years VENTEC CANADA helps its customers in animal production to optimize the efficiency of their operations.

VENTEC CANADA products reduce animal stress due to temperature change, diseases, injuries and mortality through innovative solutions for effective ventilation, patented and durable.

The accessibility of VENTEC CANADA products is via an international distribution network.

Contact us to get your nearest supplier