

Roof Vents & Air Inlets

For the last 25 years VENTEC CANADA has helped its customers in animal production optimize the efficiency of their operations.

VENTEC CANADA products reduce animal heat stress, diseases, injuries and mortality through innovative solutions for effective ventilation, patented and durable.

VENTEC CANADA products are available via an international distribution network.

Contact us for more information or to locate our nearest distributor.



T.: 450 383-4000
F.: 450 383-4004
info@ventec.ca

4000, Pinard Avenue
Saint-Hyacinthe, Québec J2S 8K4




ROOF VENTS, CHIMNEYS & AIR INLETS



AIR INLETS

Ventec air inlets design is the result of many decades of barn ventilation experience. Manufactured out of high quality plastic, the air inlets provide an excellent solution in all kinds of ventilation concepts. The air inlets, available with optional automatic return or opening systems, are perfectly adaptable to most natural or mechanical ventilation systems.

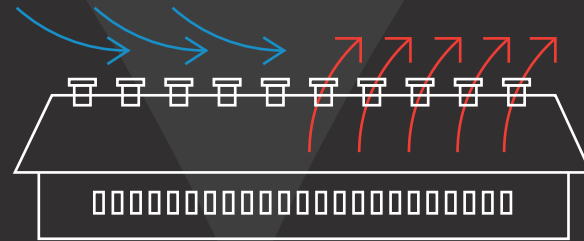

WALL MODULAR AIR INLET EM MODEL

- Dimensions:
12 po X 14 po (30.5 cm x 35.6 cm)
14 po X 22 po (35.6 cm x 55.9 cm)
- Auto-balancing static pressure inlet damper, no mechanism required.
- Manual adjustment for inlet door (Optional opening system available).
- Air flow capacity : 930 CFM & 1700 CFM respectively



CEILING MODULAR SIMPLE DOOR INLET MODEL

- Dimensions : 15 1/4 " X 22 1/4 " (38,7cm X 56,5cm)
- Air flow capacity : 1 900 CFM

FEATURES

- Ideal for changing over stagnant air from specific zones inside agricultural buildings.
- Constructed entirely of high density polyethylene (HDPE), UV and corrosion resistant ensuring product longevity.
- Insulated to reduce condensation and frost.
- Easy to clean.



CEILING MODULAR DOUBLE DOOR INLET MODEL

- Dimensions : 22 1/2 " X 22 1/2 " (57,2cm X 57,2cm)
- Air flow capacity : 2700 CFM

OPTIONS

- Also available in continuous panels
- Modular ceiling inlet for buildings of 60 feet or wider.
- HDPE flashing and accessories.
- Automatic opening system with linear actuator.



LINEAR ROOF VENT | LV MODEL

- Cascade design and geometry ensuring maximum air circulation without allowing water or snow infiltrations.
- Designed to provide proper ventilation of the attic space.
- Available dimensions: 6" X 24", 6" X 48", 6" X 96".
- Aerates surface areas up to 700 ft², 1400 ft², 2800 ft² respectively.
- Includes standard roof flashing.



INSULATED VENTEC CHIMNEY (OVAL, ROUND AND RECTANGULAR)

- Adaptable on any kind of buildings.
- Roof flashing available to match all possible roof pitches.
- Insulated flashing.
- Insulated duct and cap.
- Comes with internal damper.

*** Option : Ventec chimneys can be purchased with integrated axial fans where needed for specific ventilation conditions. Consult the factory for details and models available.

* Flow rates may vary depending on use

CHEMINEY MODEL	OVAL	ROUND	RECTANGULAR
Exterior Dimension	22 po x 32 po (55,9 cm x 81,3 cm)	22 po x 22 po (55,9 cm x 55,9 cm)	22 po x 26 po (55,9 cm x 66,0 cm)
Capacity	3000 CFM (5100 m ³ /h)	2100 CFM (3565 m ³ /h)	3200 CFM (5435 m ³ /h)

*** Customized chimneys dimension available.